

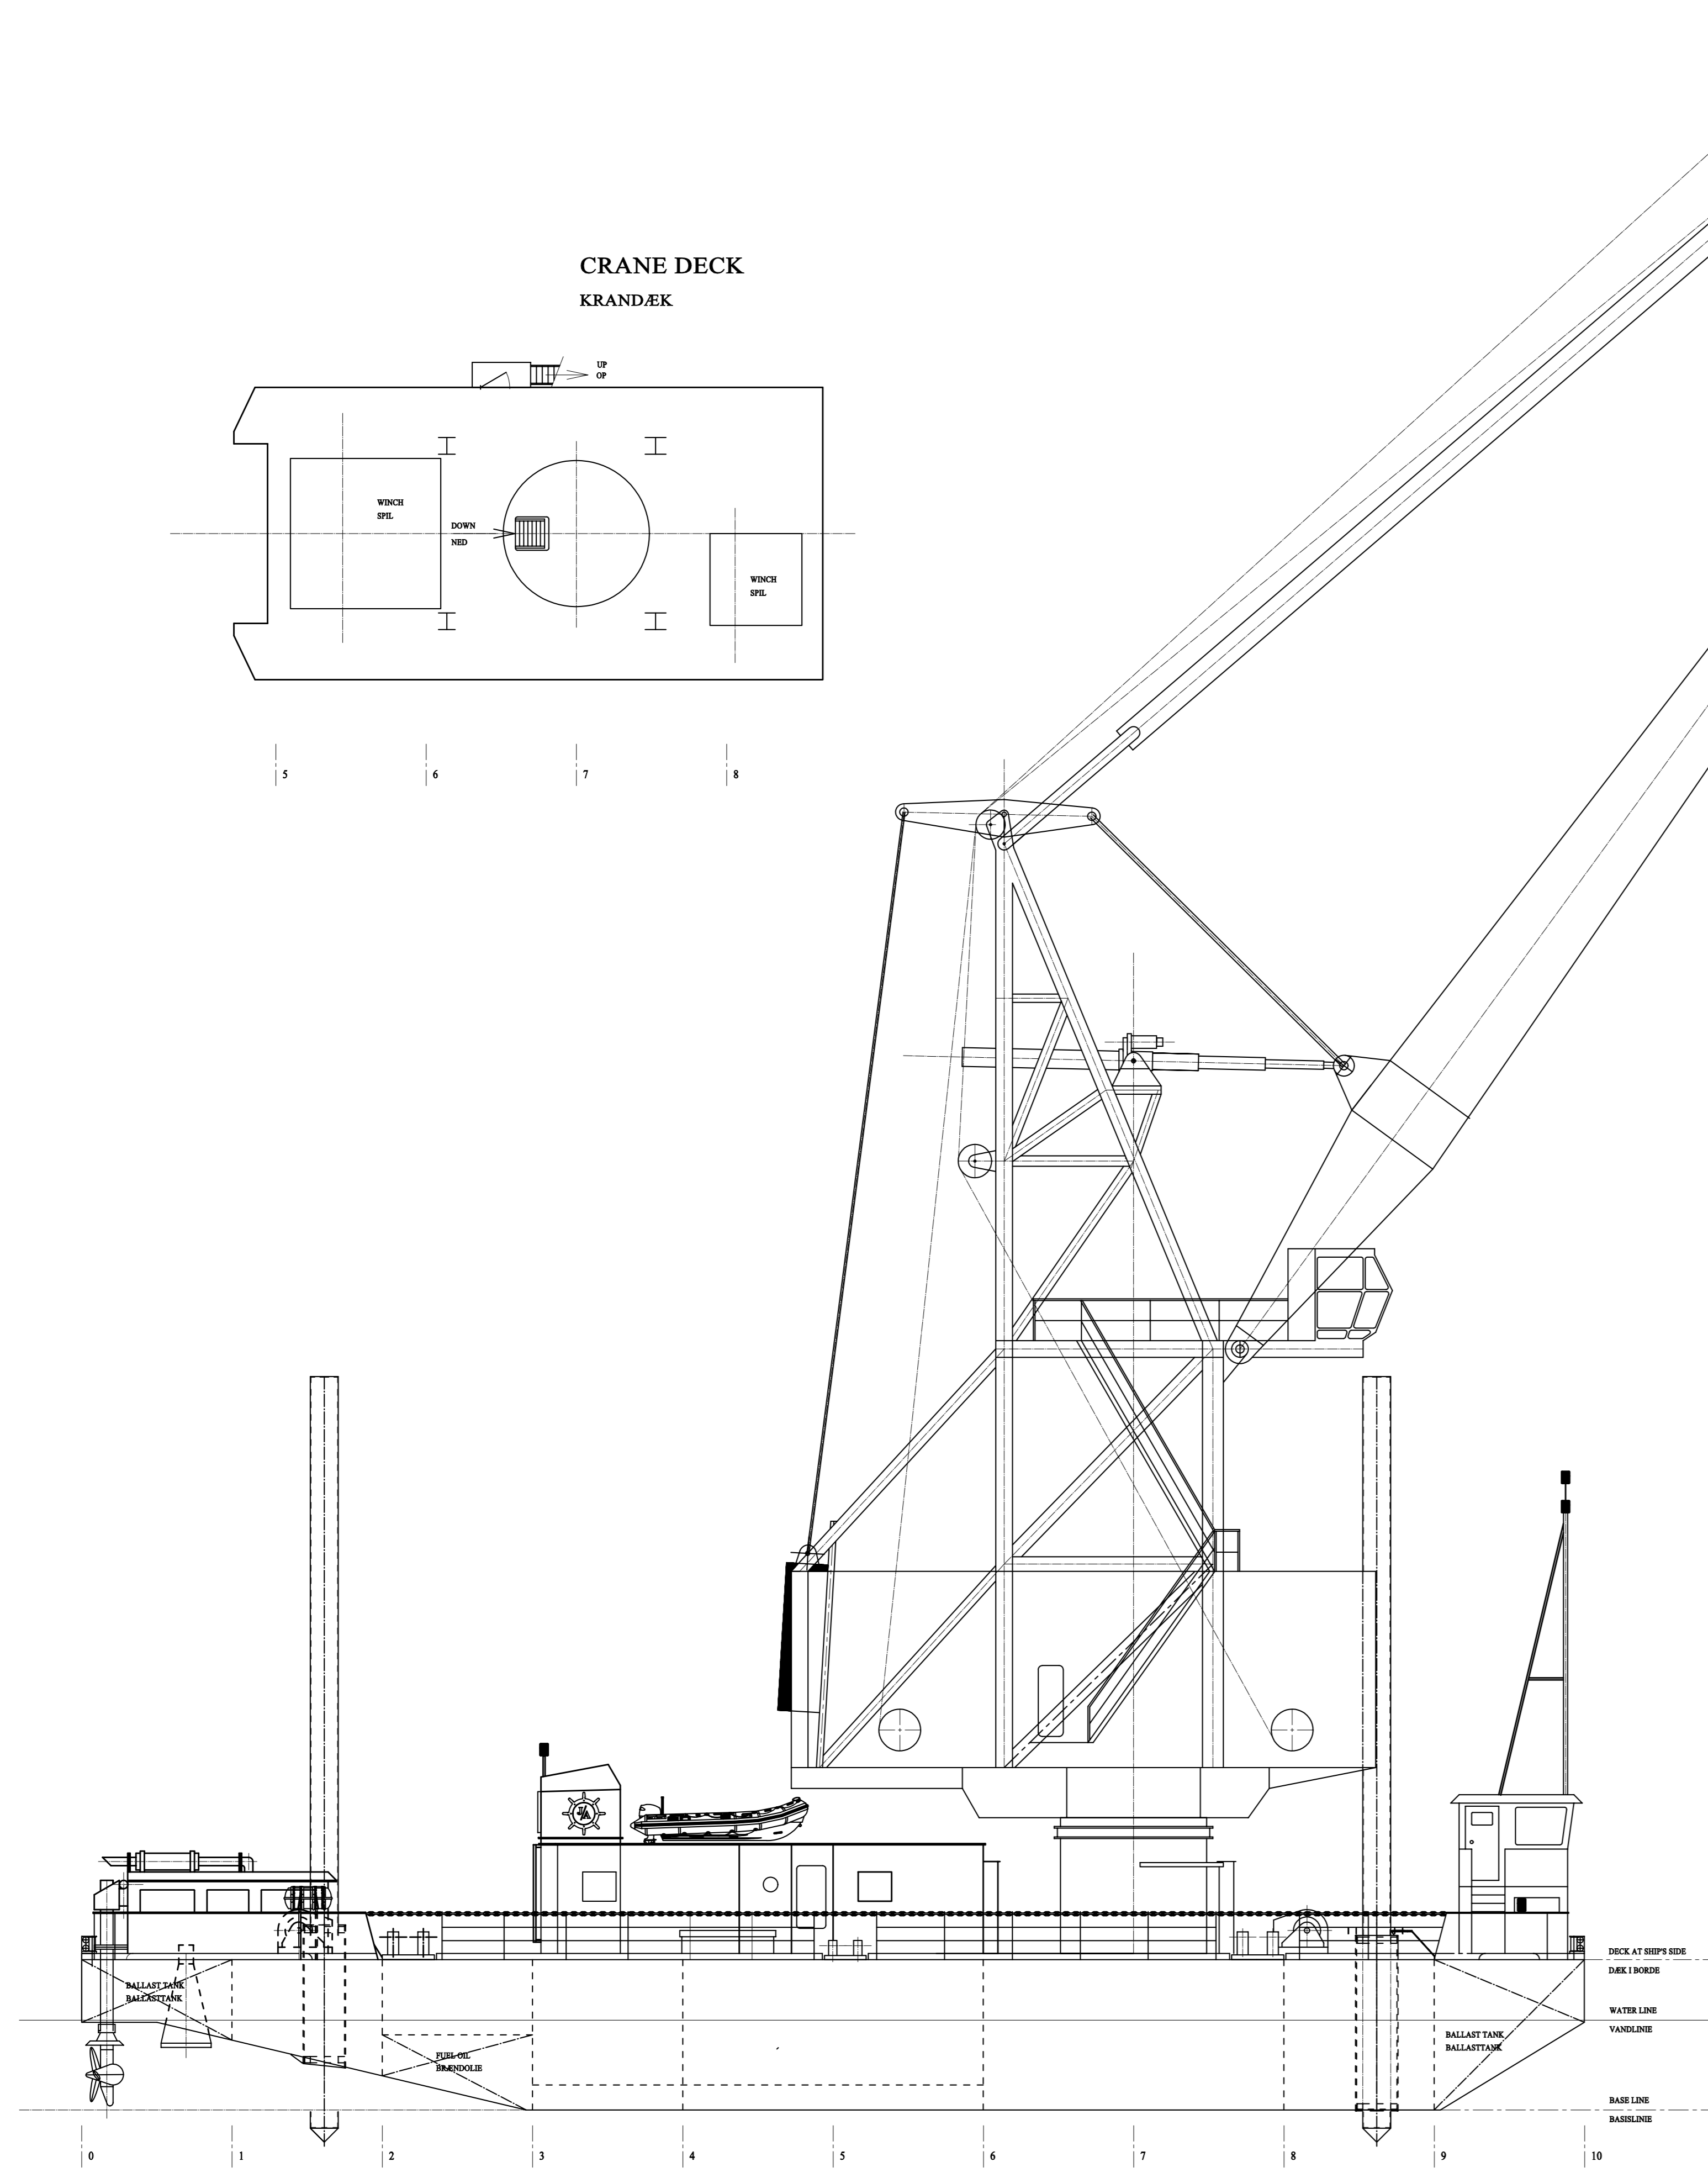


CRANE DECK  
KRANDEK

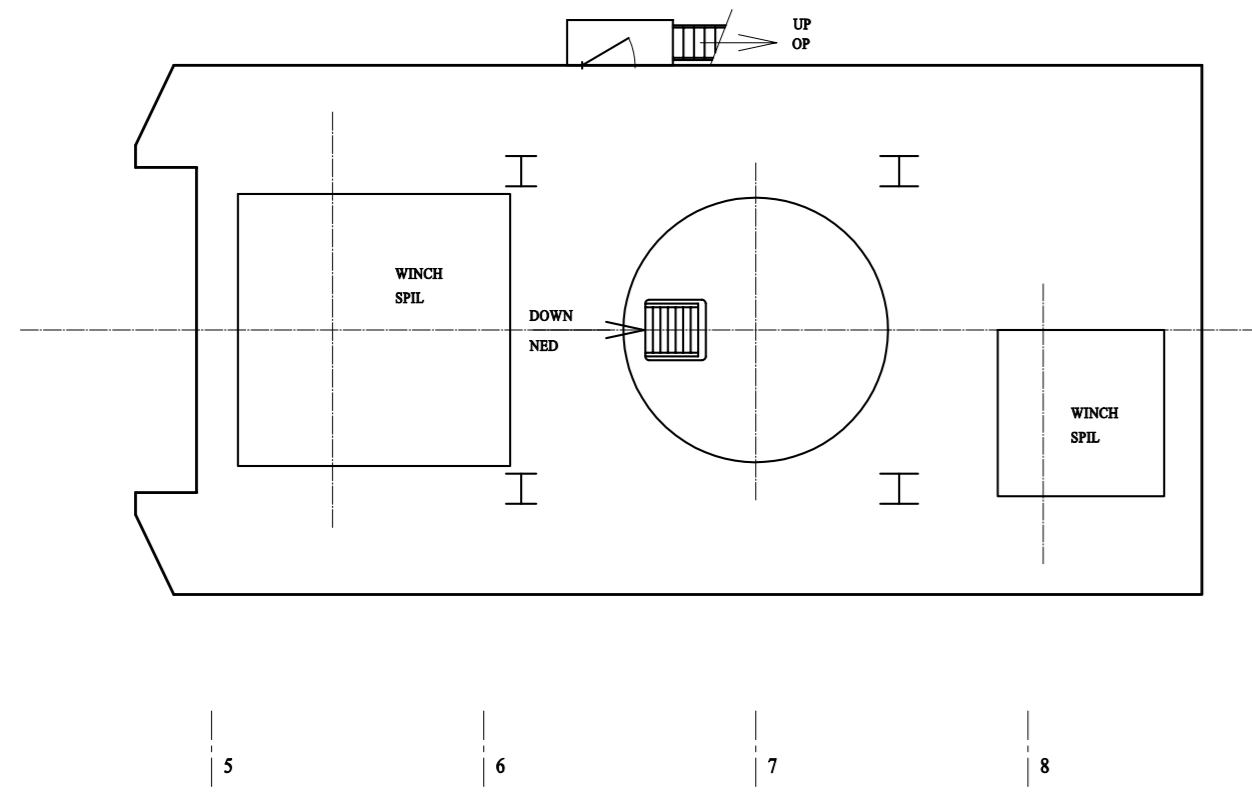


ELEVATION - SB  
OPSTALT - SB

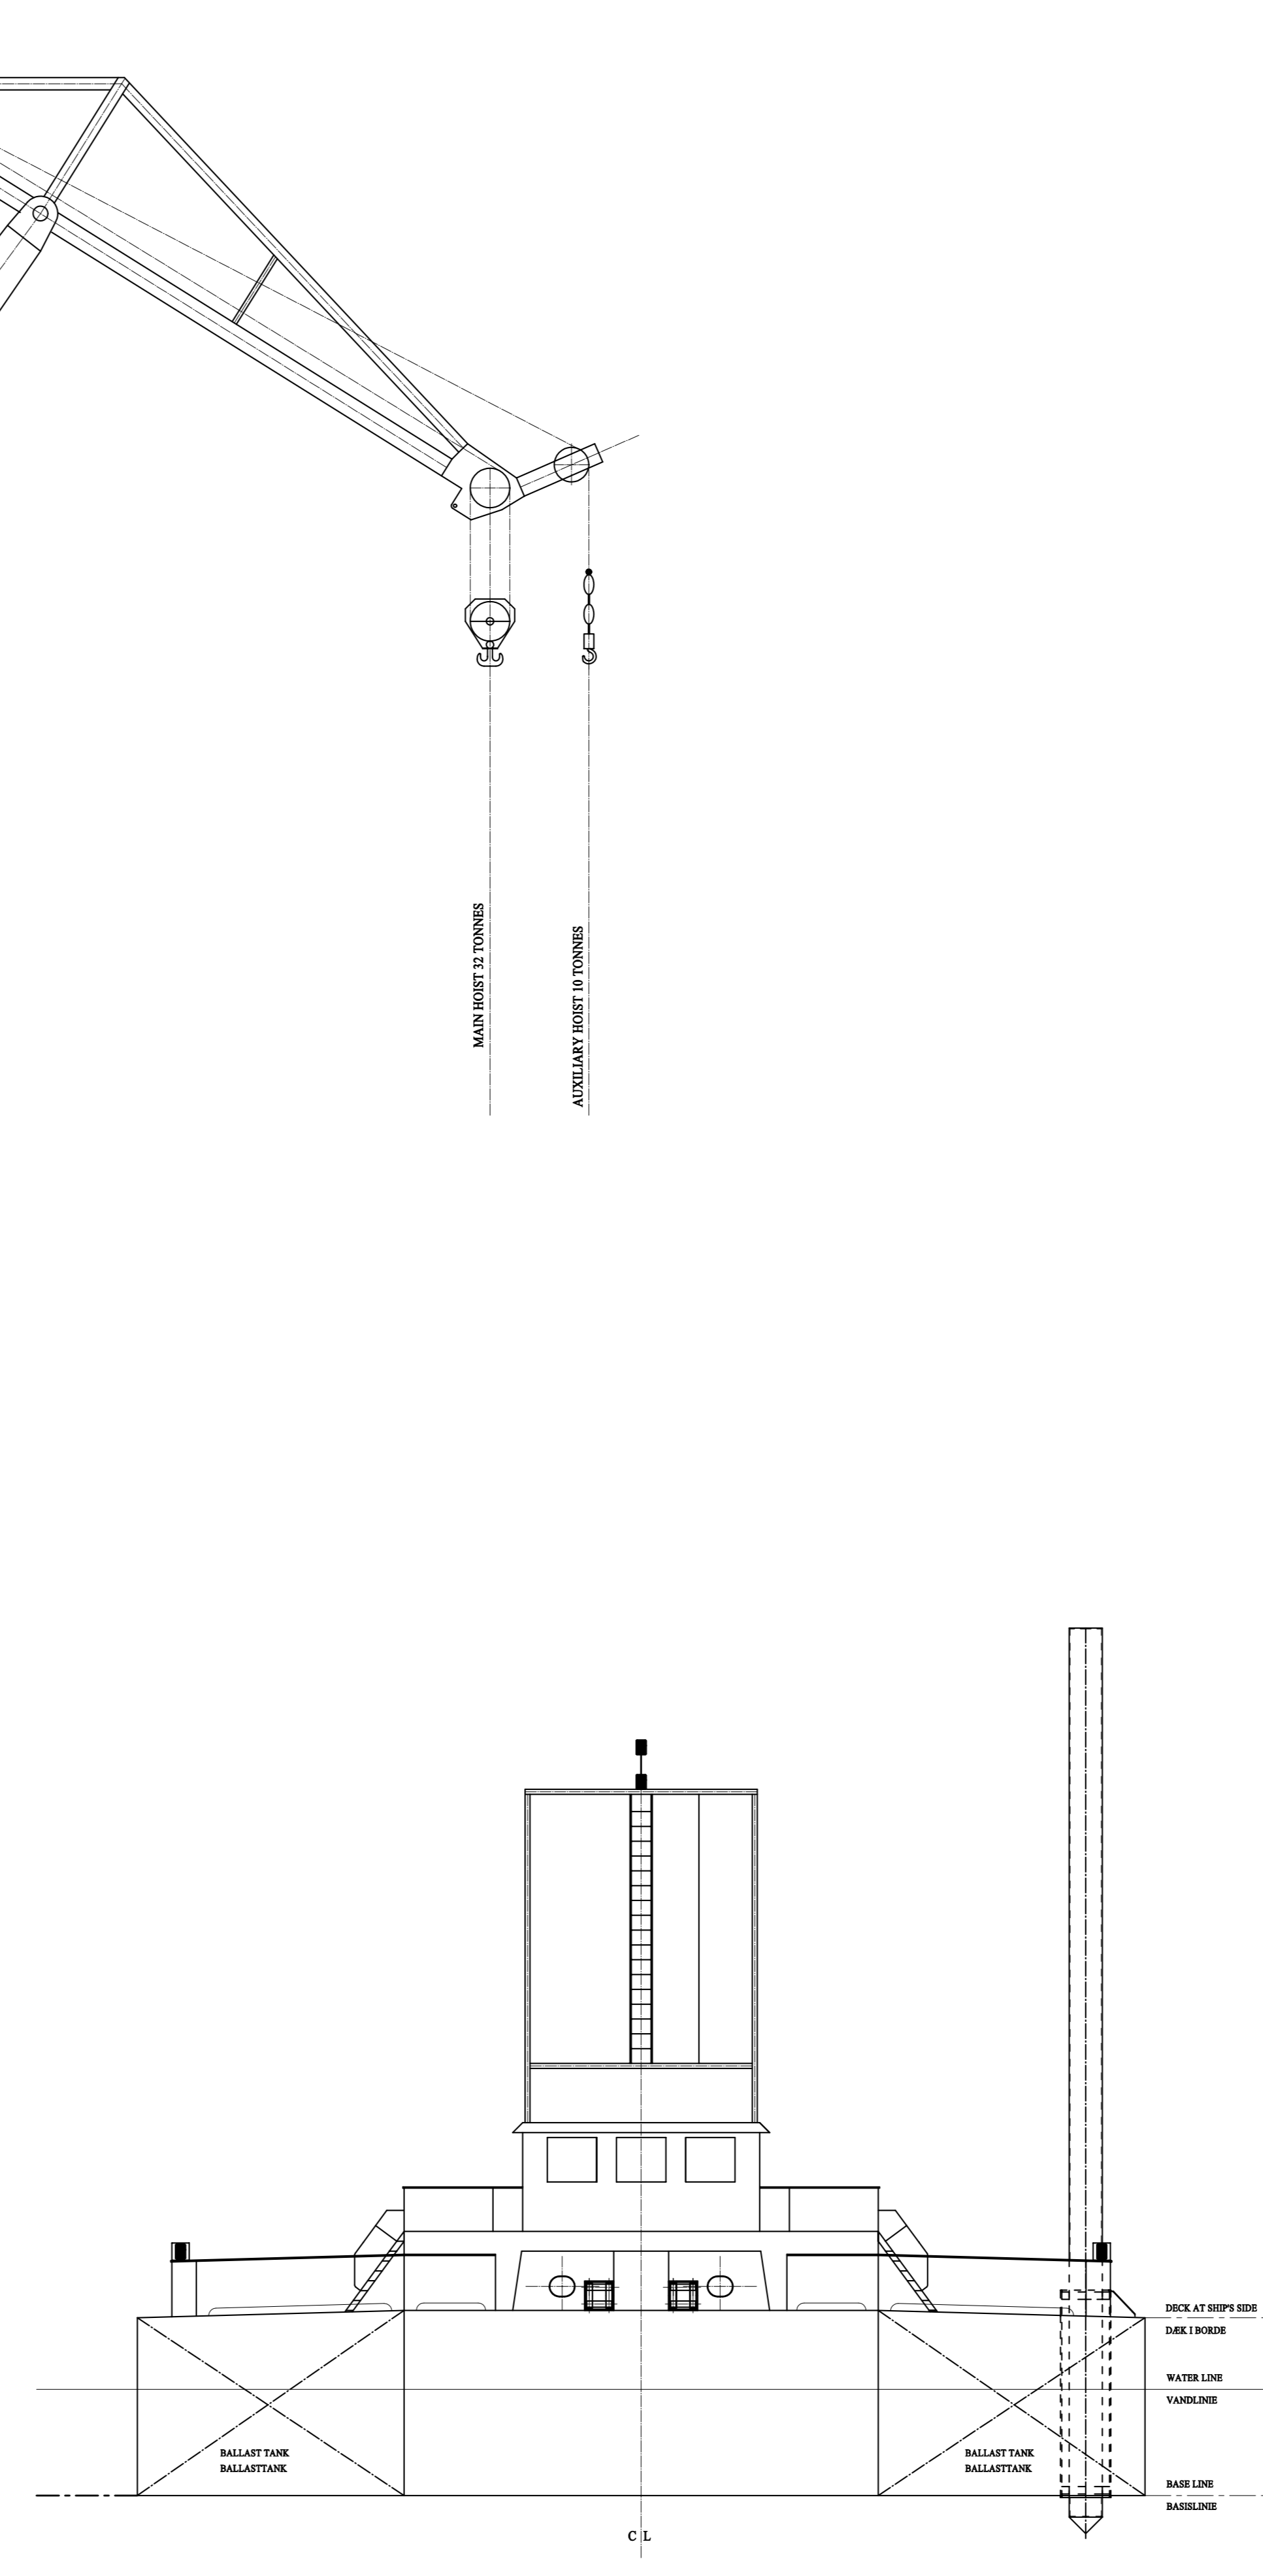


LOCKING AFT  
SET MOD AGTER

MAIN DECK  
HOVEDDEK

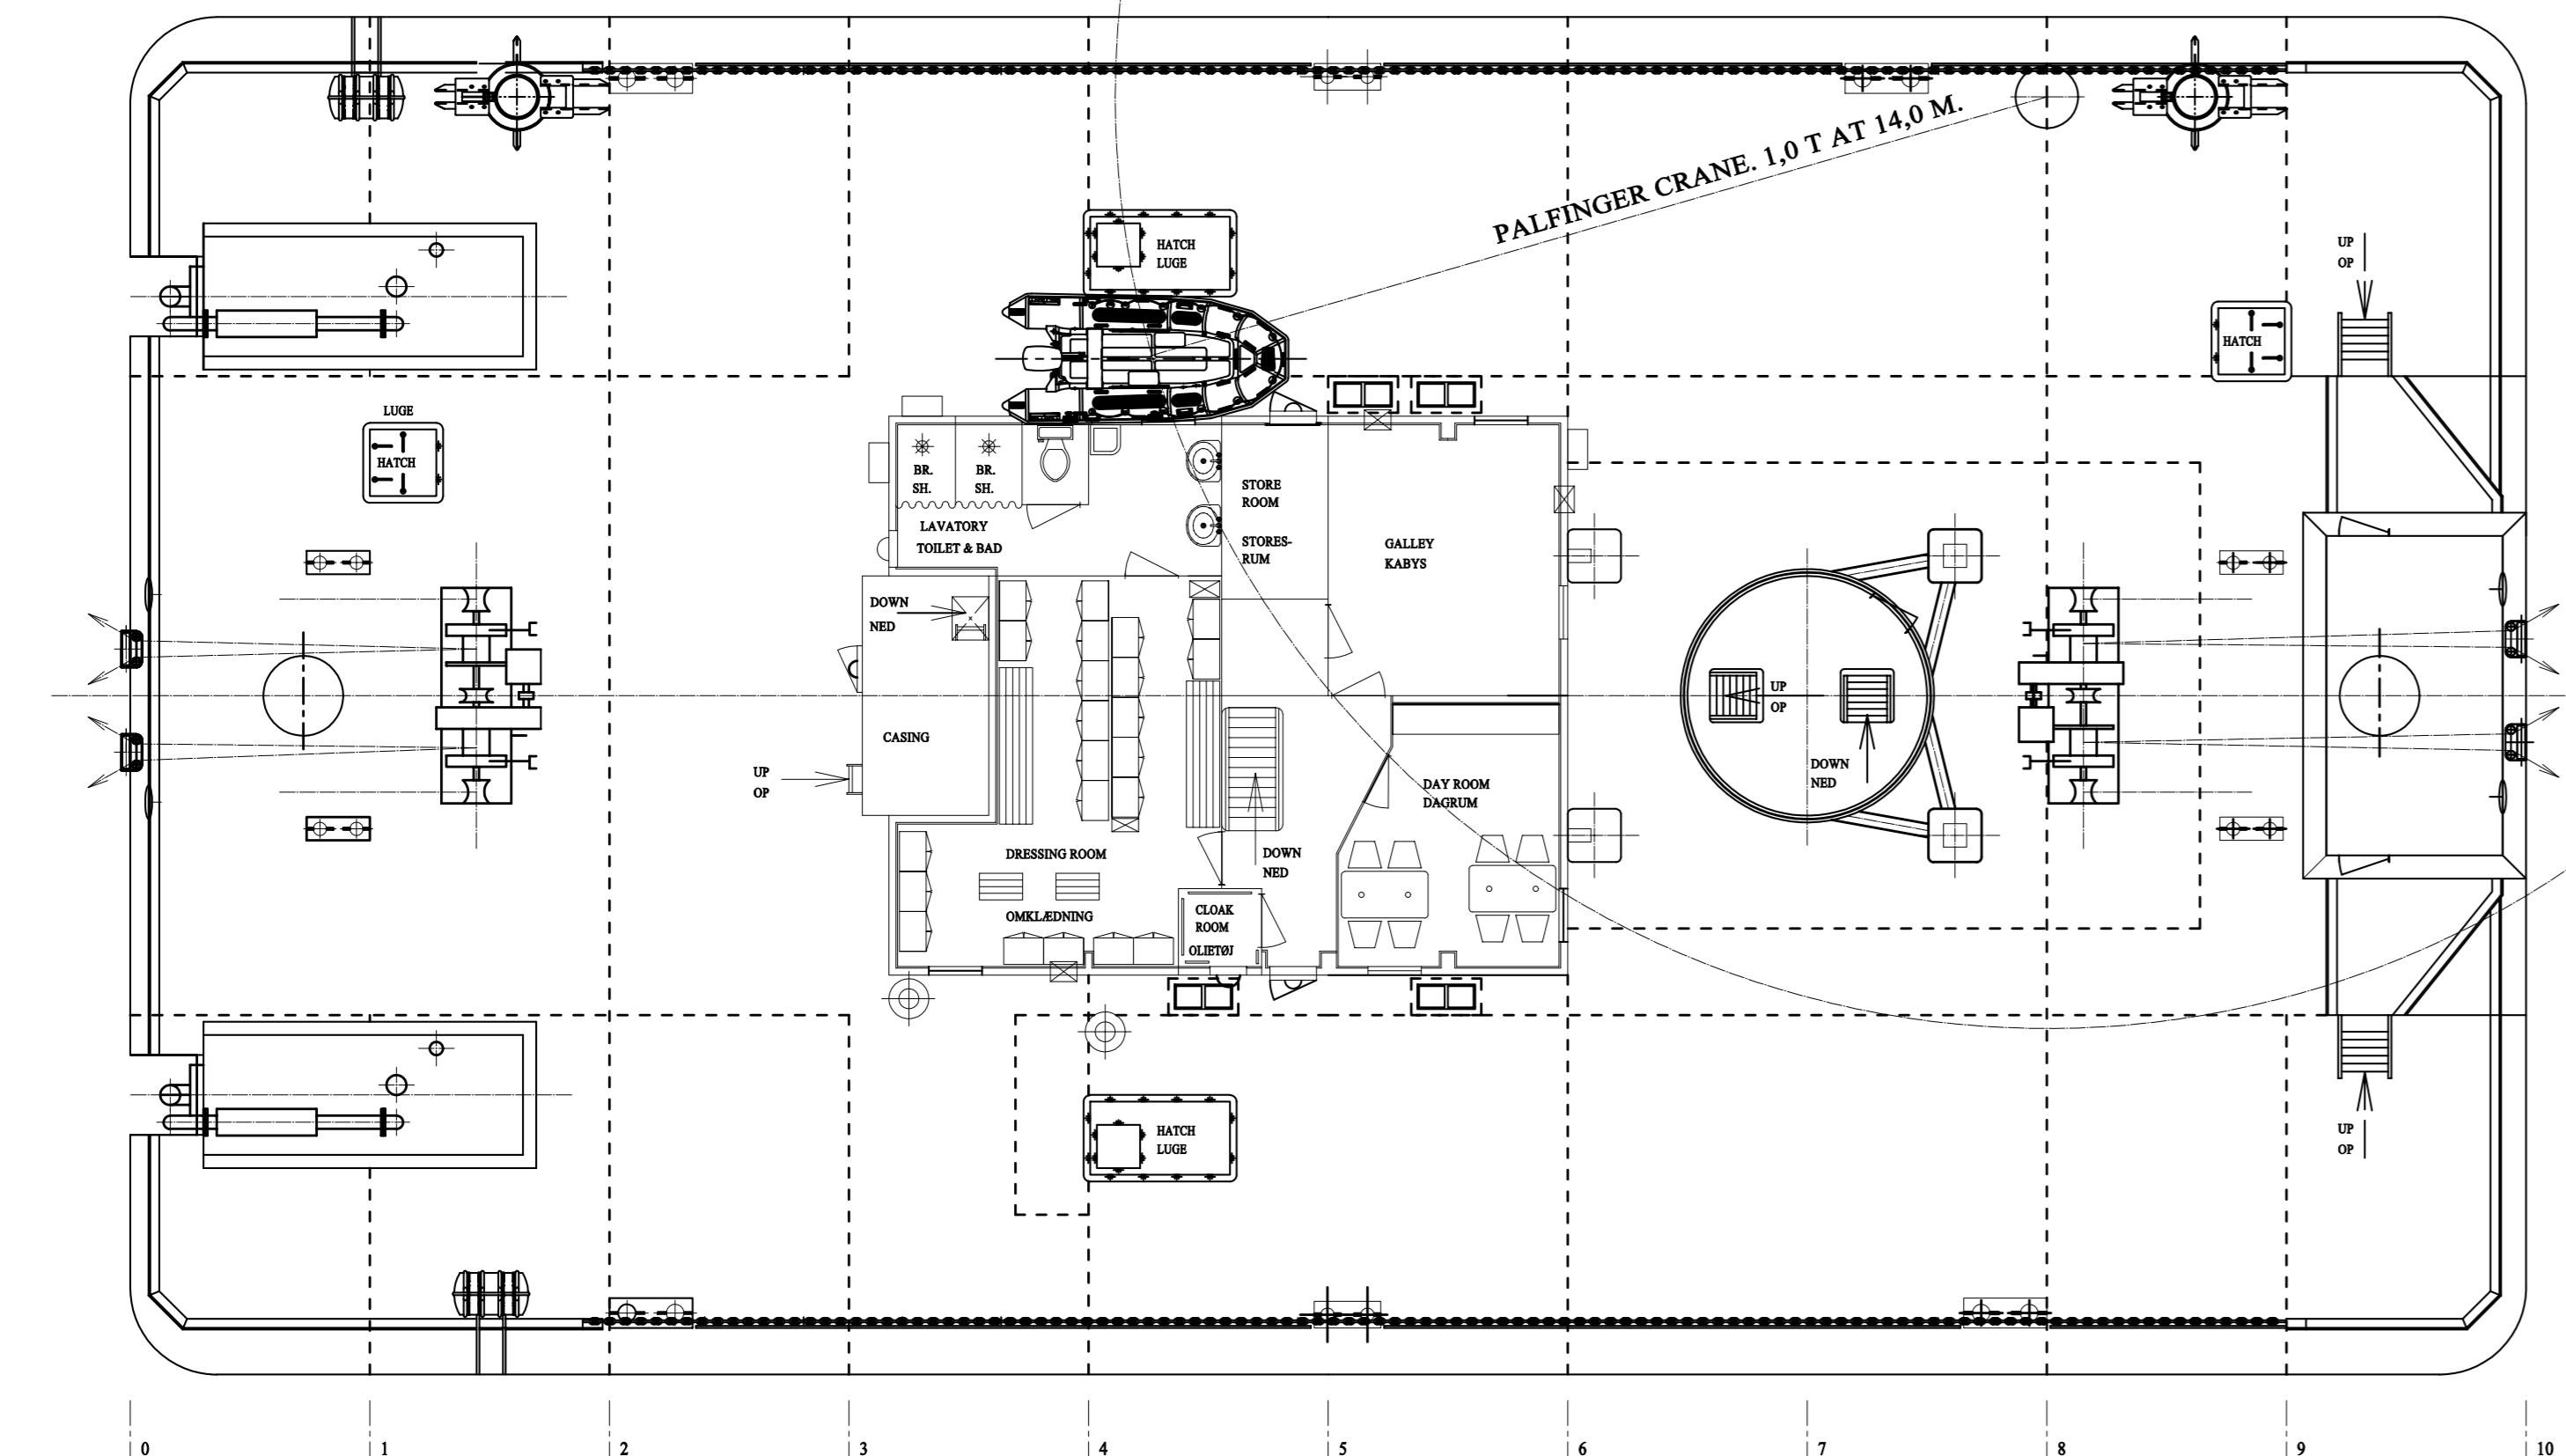

BELOW MAIN DECK  
UNDER HOVEDDEK

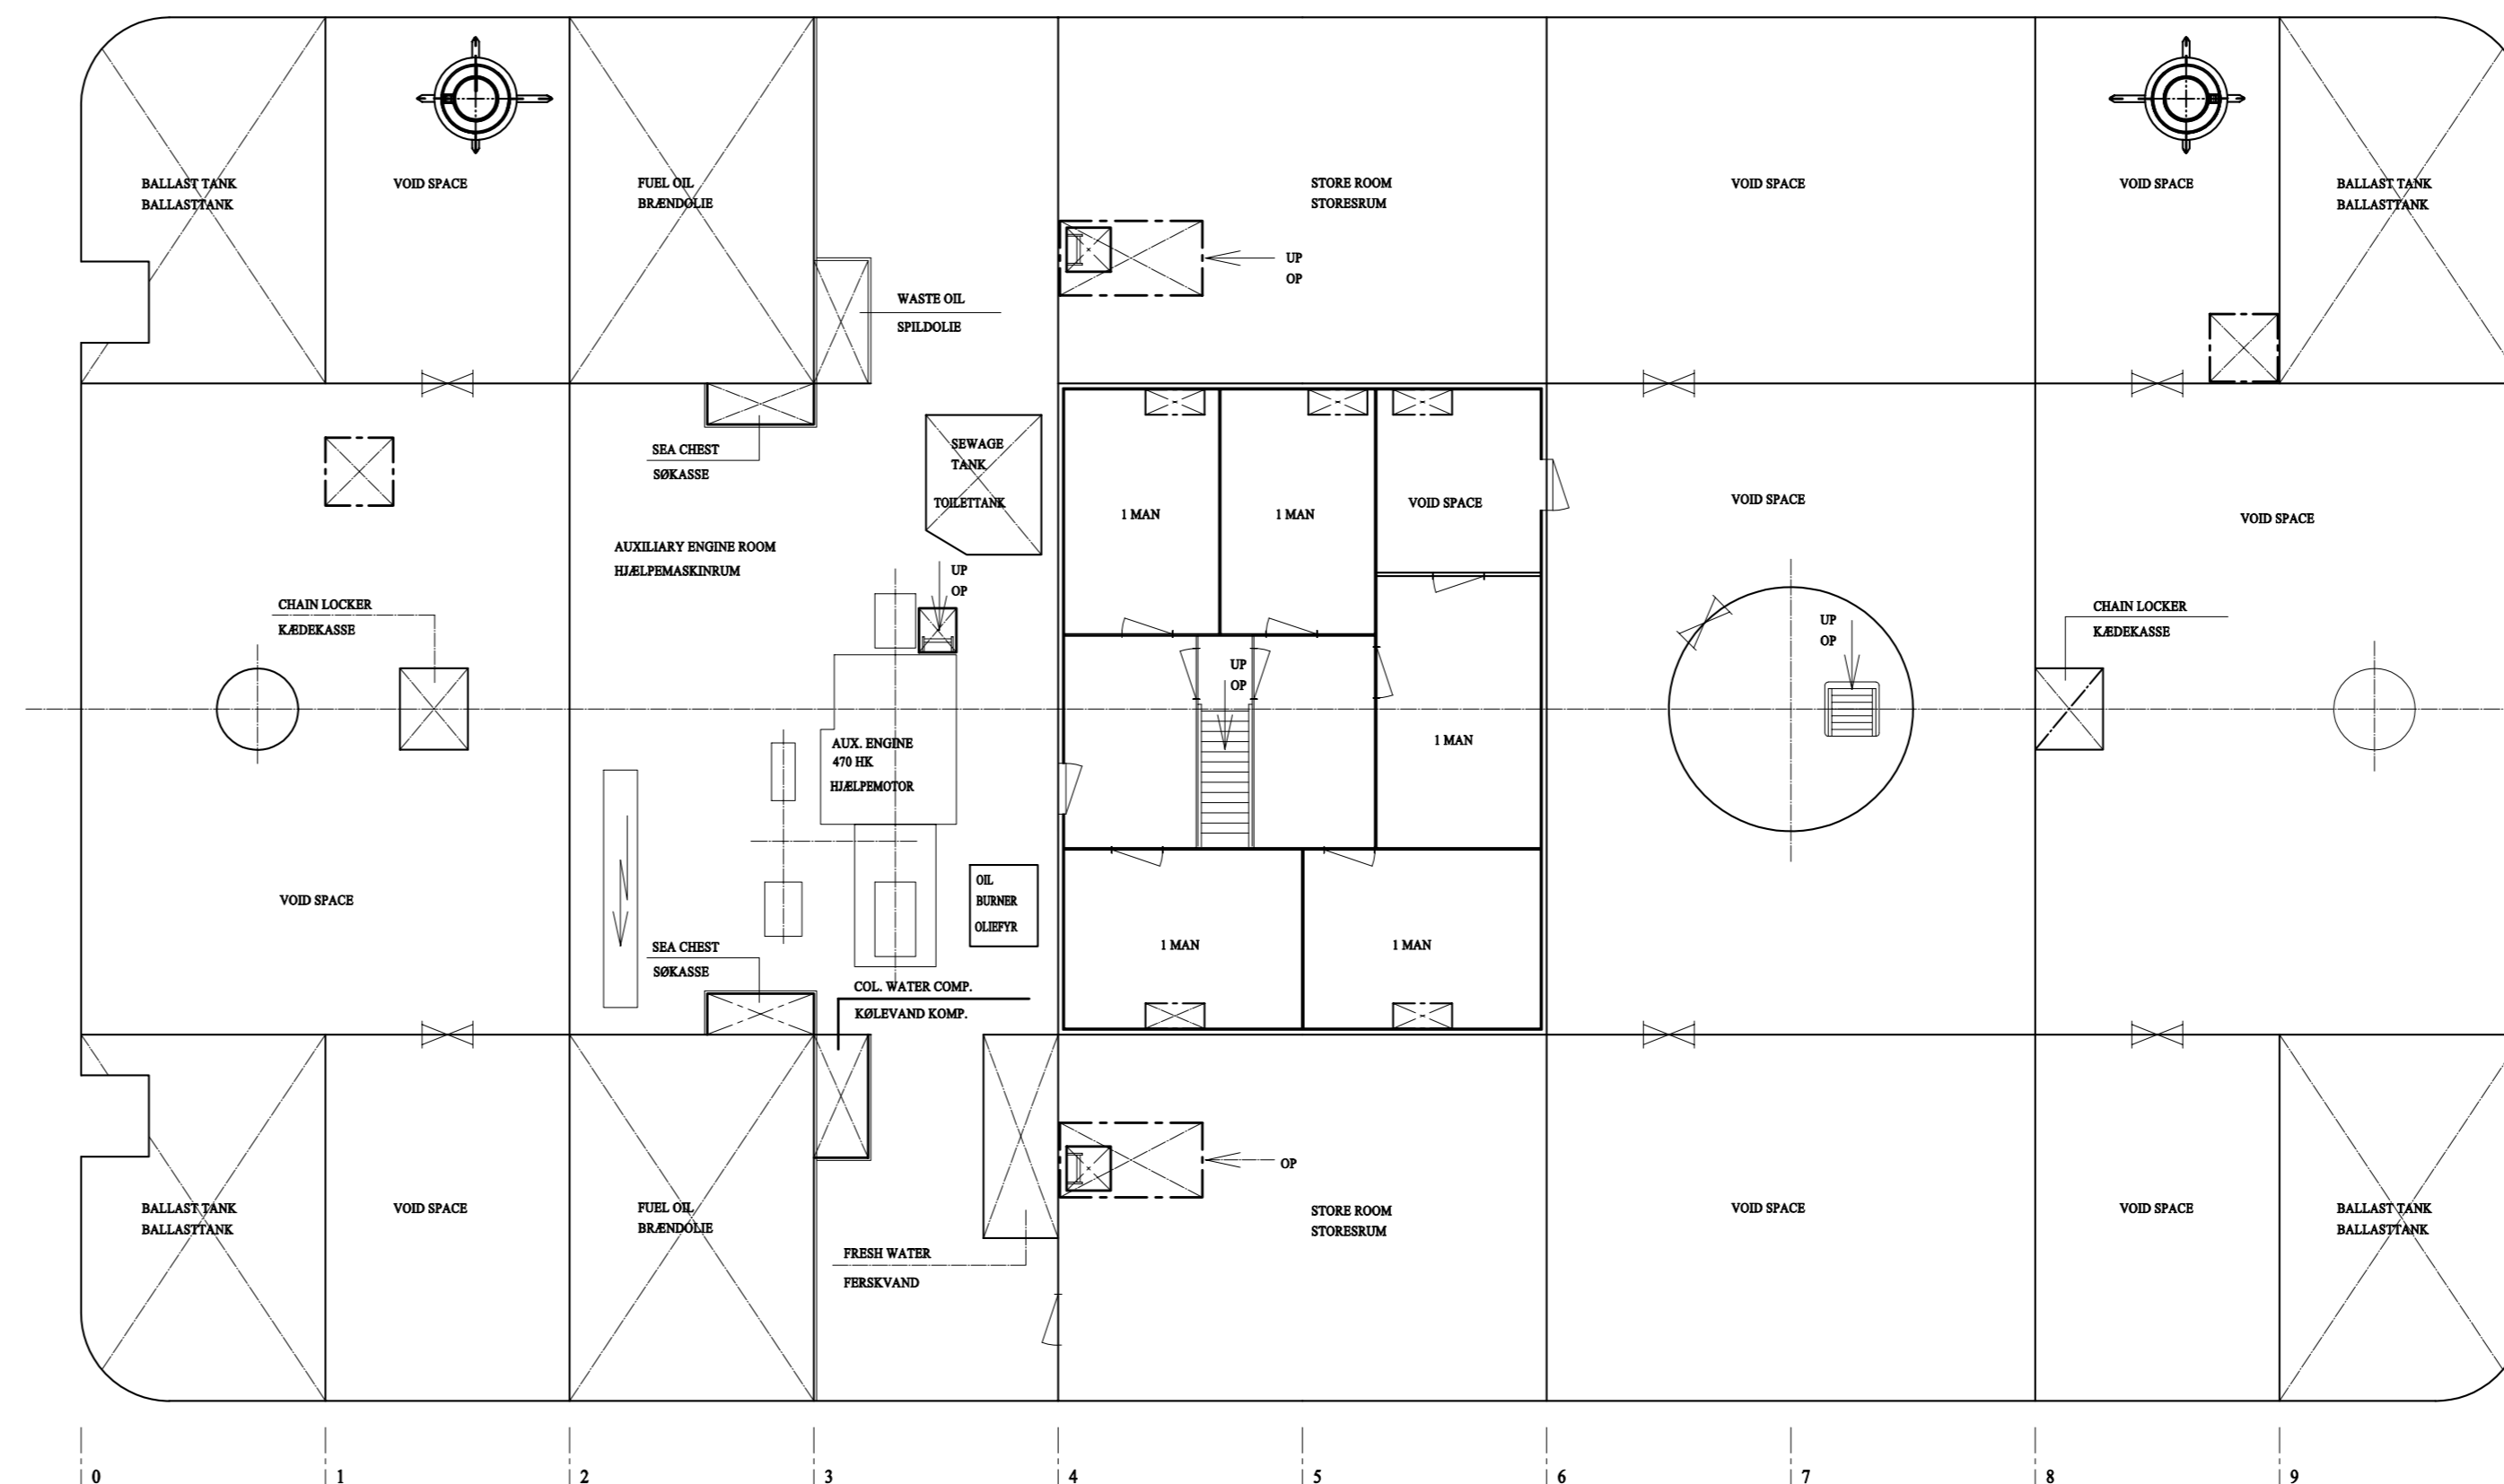

**CAPACITIES:**

Main hoist capacity	60/17,5m
BREATH MOULDED	32x32m
Main hoist speed:	15 m/min
Auxiliary hoist capacity	10 tons
Auxiliary hoist speed	25 m/min
Hoisting speed with grab: max abt.	35 m/min
Slewing speed:	0.8 rev/min
Average horizontal luffing speed	20 m/min

**PRINCIPAL DIMENSIONS**

LENGTH OVER ALL	36,00m
BREATH MOULDED	20,40m
DEPTH MOULDED TO DECK	3,60m
DEPTH LOADED	2,10m
TRANSVERSE SPACING	3,60m
FRAME SPACING	0,60m

**HOVEDDIMENSIONER:**

LENGDE OVERALT	36,00m
BREDEDE MOULDED	20,40m
DYBDE MOULDE TIL DEK I BORDE	3,60m
DYBGANG LASTET	2,10m
WEBAFSTAND (KONSTRUKTIONSSPANT)	3,60m
SPANTEAFSTAND	0,60m

**J A REDERIET**  
BRÅ HILLEVEJ 11 DK 8781 STENDERUP DENMARK Tel. +45 7565 0094 Fax +45 7565 0994  
Email: jare@jareppig.com Web: http://www.jareppig.com

**GENERAL ARRANGEMENT**

Date:	06-08-2005
Scale:	1:100
Sign:	JRK
Page no.:	501900-01A